

Pallana Light

IDEO



Practically playful! The Pallana Light by IDEO is a suspended lighting fixture that supports you in the balancing act that is daily life. Pallana's mechanically joined classic shapes create a dynamic and adaptable design, making it a playful task light. Spin the ring lights to assist you when working, eating, cooking, helping your children with homework, or whatever occasion. Pallana Light is available in two muted colours to match any interior style and colour palette. The added softness of the matte textured rings and knitted fabric sets Pallana apart from traditional finish choices. With the dim-to-warm functionality, you can control the colour temperature and light intensity simultaneously! Pallana brings touch of exuberance to any room, while supporting your flow activities and moods throughout the day.

Detailing




Eating, working, cooking. Whatever the occasion or space, Pallana is up to the task.

Colours




Pebble



Slate

Pallana Light / Pallana Light 6

Dimensions

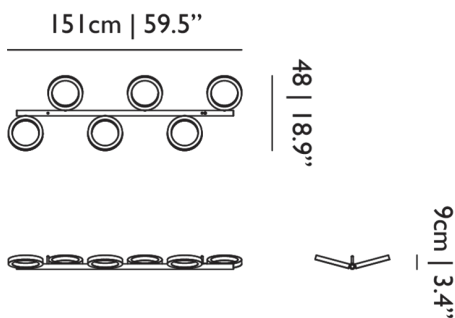

Product

WIDTH 151.5cm | 59.6"
HEIGHT 9.5cm | 3.7"
DEPTH 48.5cm | 19.1"
WEIGHT NETTO 7.5kg | 16.53lbs

Packaging

WIDTH 57cm | 22.4"
HEIGHT 22cm | 8.7"
CUBAGE 0.2m³ | 7.17ft³
LENGTH 162cm | 63.8"
WEIGHT 12.5kg | 27.56lbs

Technical UL / CE

MATERIAL

Metal tube with knitted fabric sleeve, powdercoated aluminium rings & plastic diffusers.

ENERGY LABEL

G

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

6

INPUT VOLTAGE

120-250V

FREQUENCY

50/60

MAX POWER CONSUMPTION

58W

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

250cm | 98.4"

SWITCH

No

CANOPY

Pebble III in matching colour

CHROM X

0.4358

CHROM Y

0.4014

CRI

93

LIGHT OUTPUT

3800 lm

COLOUR TEMPERATURE

3000 K (max)

LIGHT DIRECTION

All directions

R9

71.1

DIMMING & LIGHTING CONTROL

Wireless Wall Switch (dimmer), DALI dt6, Push / Pulse
dim on Line Voltage, Dim to Warm, Smart Home
Integration (Zigbee), Mains / ELV dimming is not
possible, Smart Home Integration (Matter)

See last page for more information about the dimming possibilities.



Dimming & Lighting Control

Wireless Wall Switch (dimmer)

With our Wireless Wall Switch, you'll have full control over your Moooi lighting design with one touch. Our Wireless Wall Switch comprises two components, a wall switch and radio device to put in the canopy of your Moooi lighting design. The Wall Switch can also be integrated in existing System 55 (i.e. Gira and Jung) or Decora style wall switches. Once the radio device is installed you will also have the possibility to control your light fixture with the Casambi App available in the Google Play and Apple app store. Within moments you can enjoy full and fluent dimming, all the way to dark.

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE

DALI dt6

The luminaire is dimmable by integrating it into a DALI network. This is an universal and professional standard in home automation systems with endless control possibilities and ease. We advise to hire a professional to integrate the luminaire into your DALI network.

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE

Push / Pulse dim on Line Voltage

The luminaire is dimmable by using an external momentary switch or pushbutton switch. The switch is usually mounted on an existing wall socket. In some cases a Phase or Control wire needs to be added to your home's wiring. The switch should be suitable for use with line voltage and of the type 'normal off - momentary on'. The luminaire dims perfectly when the switch makes and holds contact. A short press switches between on and off.

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE

Dim to Warm

3000k - 2100k Dim to Warm

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE

Smart Home Integration (Zigbee)

By adding a Zigbee converter this light fixture can seamlessly integrate into a Zigbee 3.0-based smart home network, such as Philips Hue, Amazon Alexa, Google Home, Ikea Tradfri and Homey. This integration allows for wireless control and compatibility with other smart home systems, without the need to change your home's wiring. To enable this, simply add a Zigbee converter to your luminaire. We recommend the Sunricher Zigbee to Dali

Converter for its reliability and compatibility with the US 110 voltage or the Osram 4062172044776 Zigbee 3.0 DALI Converter LI for 210-220V Please note that this converter is sold by third-party vendors and not directly by Mooodi and this should be installed by a professional electrician.

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE

Mains / ELV dimming is not possible

Mains and/or ELV dimming is not possible. The wireless wall switch is advised for dimming in this case.

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE

Smart Home Integration (Matter)

Using the Matter Dali Bridge / Converter this Light can seamlessly integrate in your Matter Smart Home system like Apple Home, Google Home, Home Assistant, Amazon Alexa, Samsung SmartThings and Homey. We recommend the M2D Bridge Converter for its reliability and compatibility. Please note that this converter is sold by third-party vendors and not directly by Mooodi and this should be installed by a professional electrician.

Compatible models: Pallana Light 6 CCC, Pallana Light 6 UL, Pallana Light 6 CE
