


La linea - 5mt

BIG - Bjarke Ingels Group



IP65   Dimmerable: 

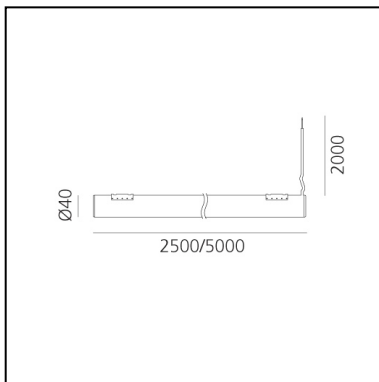

LUMINAIRE

- Watt: **15W/m**
- Delivered lumen output: **960 lm/m**
- CCT: **3000K**
- Efficiency: **100%**
- Efficacy: **64lm/W**
- CRI: **95**
- Dimmable Typology: **APP,Push,Dali**

Notes

10 wall/ceiling supports included
Weight 1,4 kg/m
Driver not included

DESCRIPTION

La Linea is a flexible tube of light capable to freely twist and turn in space according to undefined geometries. It easily fits into indoor and outdoor spaces with fixing elements that disappear into the cross section, allowing countless applications in a broad variety of locations thanks to an unprecedented combination of factors including light quality, IP protection grade and flexibility. Available in 2.5 and 5-meter lengths.

La Linea 25 increasingly becomes a communicative as well as a functional tool, adding values and meanings to its light through the expressiveness of its graphic sign.

It has excellent light performance in terms of quantity and quality, allowing not only the characterisation of a space but also its correct lighting.

The slim section with lengths of 5, 10 and 20 meters can be overlapped to create weaving and leaving the freedom to follow complex geometries like figures created by a single line. It combines innovation with emotion, liaising with man-built and natural spaces in which it is applied. It is sustainable, reconfigurable and long-lasting.

FEATURES

- Product Code: **T4600010**
- Colour: **White**
- Installation: **Ceiling, Wall**
- Material: **High diffusion optical silicone lamp body. Transparent technopolymer wall mounts. Steel recessed ceiling mounts, steel and aluminum surface-mounted ceiling mounts.**
- Series: **Design Collection, Architectural Outdoor**
- design by: **BIG - Bjarke Ingels Group**

DIMENSIONS

- Length: **5000 mm**
- Diameter: **40 mm**

Accessories

NO
IMAGE
AVAILABLE

Additional wall/ceiling support R304975

NO
IMAGE
AVAILABLE

Driver 120W - CV 220-240V - 24VDC - SELV - On-Off -
300x40x30 (LxWxH) - IP20 DV1033

NO
IMAGE
AVAILABLE

Driver 90W - CV 100-240VAC - 24VDC - 0-10V -
250x63x30mm (LxWxH) - IP65 DV1075

NO
IMAGE
AVAILABLE

Driver 90W - CV 110-240VAC - 24VDC - Push & APP -
250x100x52mm (LxWxH) - IP20 DV1075APP

NO
IMAGE
AVAILABLE

Driver 90W - CV 100-240VAC - 24VDC - DALI/On-
Off - 250x63x30mm (LxWxH) - IP65 DV1076

NO
IMAGE
AVAILABLE

Powerkit 96W - CV 110-240VAC - 24VDC - On-Off -
400x110x52mm (LxWxH) - IP20 A4681210

NO
IMAGE
AVAILABLE

Powerkit 96W - CV 110-240VAC - 24VDC - DALI/0-
10/Push - 400x110x52mm (LxWxH) - IP20
A4681010

NO
IMAGE
AVAILABLE

Powerkit 96W - CV 110-240VAC - 24VDC - Push &
APP - 400x110x52mm (LxWxH) - IP20 A4681010APP

NO
IMAGE
AVAILABLE

Powerkit 96W - CV 110-240VAC - 24VDC - Push &
APP - 400x104x61mm (LxWxH) - IP65
T4681010APP