


ZIRKOL SQUARE

ZIRKOL – S is a family of polygonal suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version or with double light emission with high flux and different colour temperatures.

Remote driver and dimmer interface included

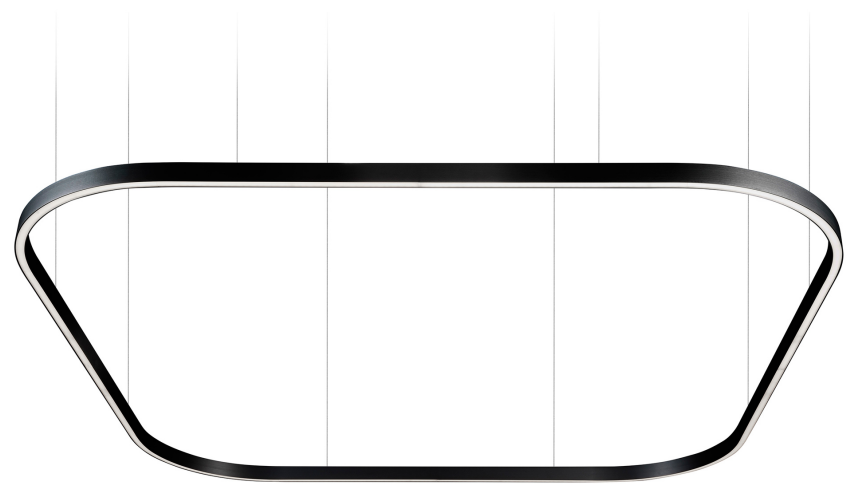

1,5X1,5M | DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 77W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 110/240V |
| Color temperature | 2700K |
| Luminous flux | 4432lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 150x150x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 6,1 kg |


Codes

BZRQ1606G15DBO
BZRQ1606G15DNE
BZRQ1606G15DOR


PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni



NEMO^{3.000}

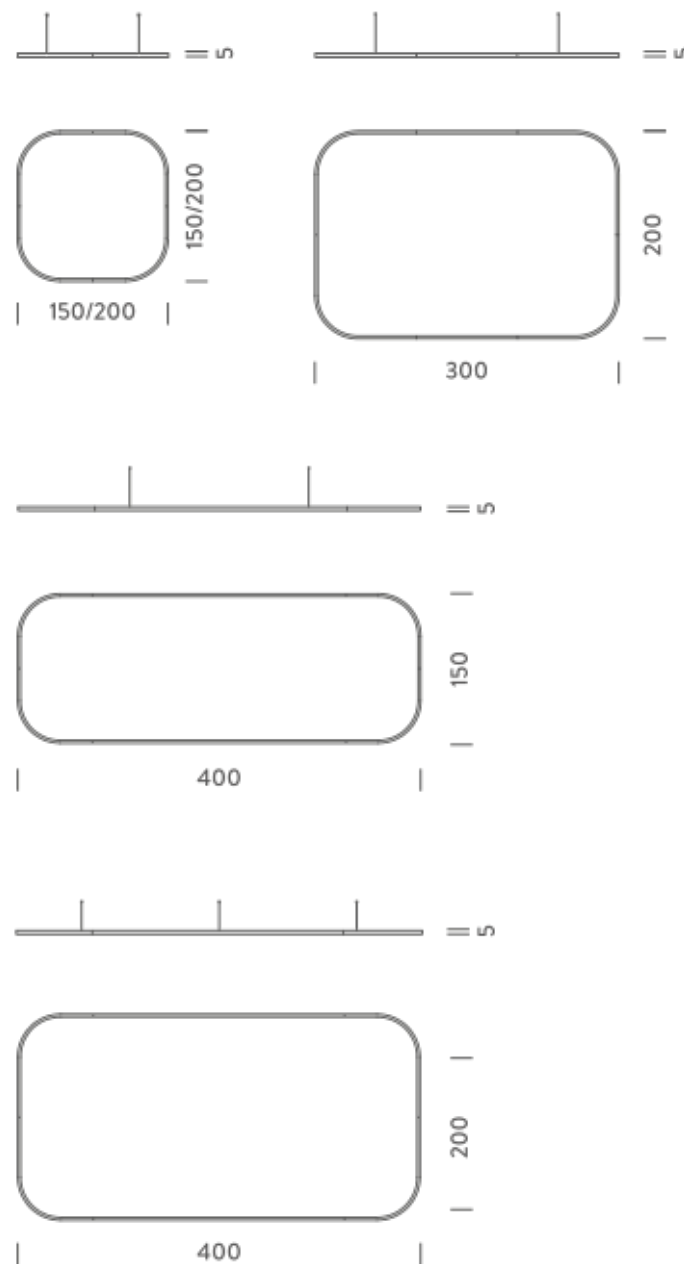

1,5X1,5M | UP - DOWNLIGHT - 2700K

LAMPING

| | |
|-------------------|---------------------|
| Source | Linear LED |
| Total power | 154W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 8863lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 150x150x5cm |
| Materials | Aluminium |
| Notes | |

included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled

Customization options

Shapes, sizes

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

6,1 kg

Codes

BZRQ1712G15DBO
BZRQ1712G15DNE
BZRQ1712G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni



NEMO 3.000

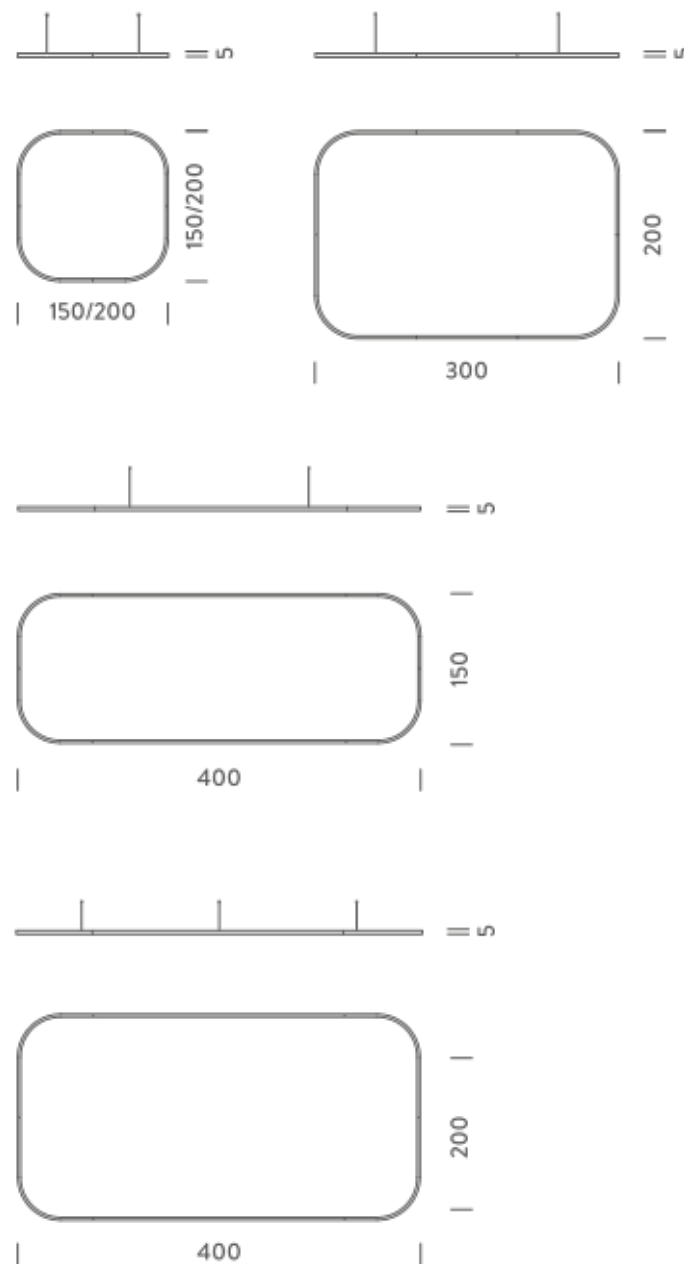

1,5X1,5M | DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 77W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 110/240V |
| Color temperature | 3000K |
| Luminous flux | 4692lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 150x150x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 6,1 kg |

Codes

BZRQ1606G15WBO
BZRQ1606G15WNE
BZRQ1606G15WOR


PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni



NEMO^{3.000}

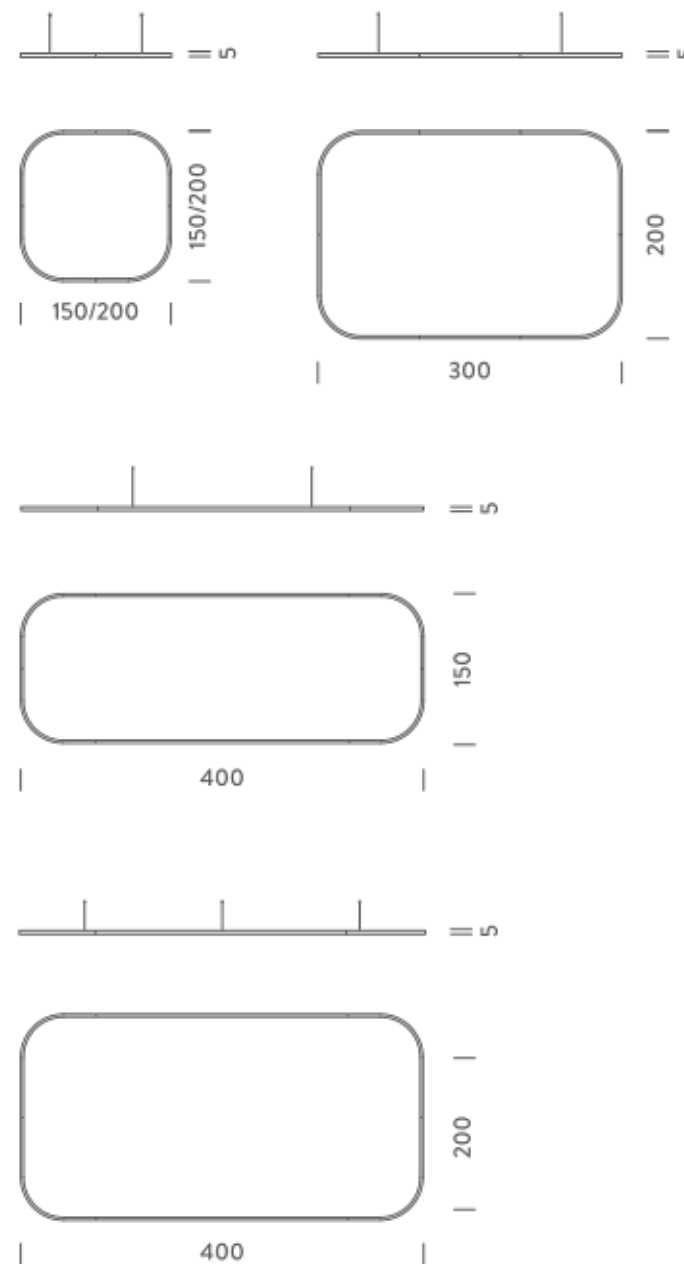

1,5X1,5M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 154W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 9384lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 150x150x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 6,1 kg |

Codes

BZRQ1712G15WBO
BZRQ1712G15WNE
BZRQ1712G15WOR


PACKAGE

Package 01

Structure

white
black
gold

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

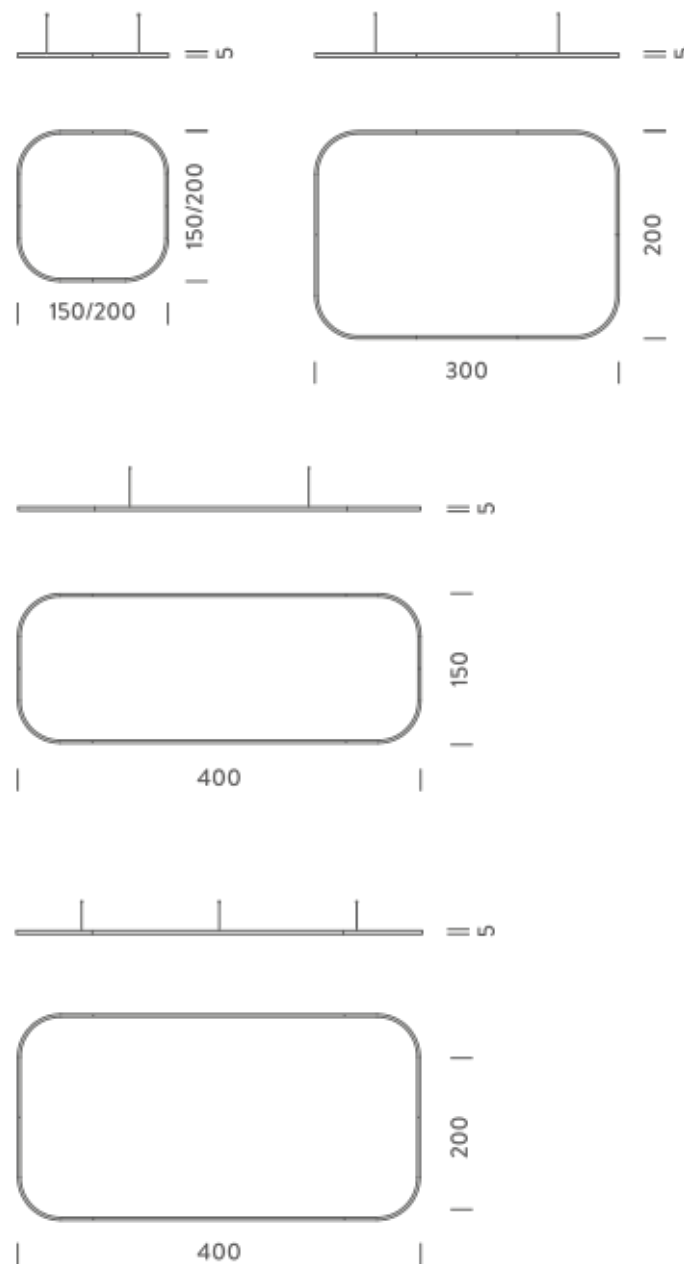

Certificazioni



NEMO 3.000

1,5X1,5M | DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 77W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 110/240V |
| Color temperature | 4000K |
| Luminous flux | 5214lm |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 150x150x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 6,1 kg |

Codes

BZRQ1606G15NBO
BZRQ1606G15NNE
BZRQ1606G15NOR


PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni



NEMO 3.000

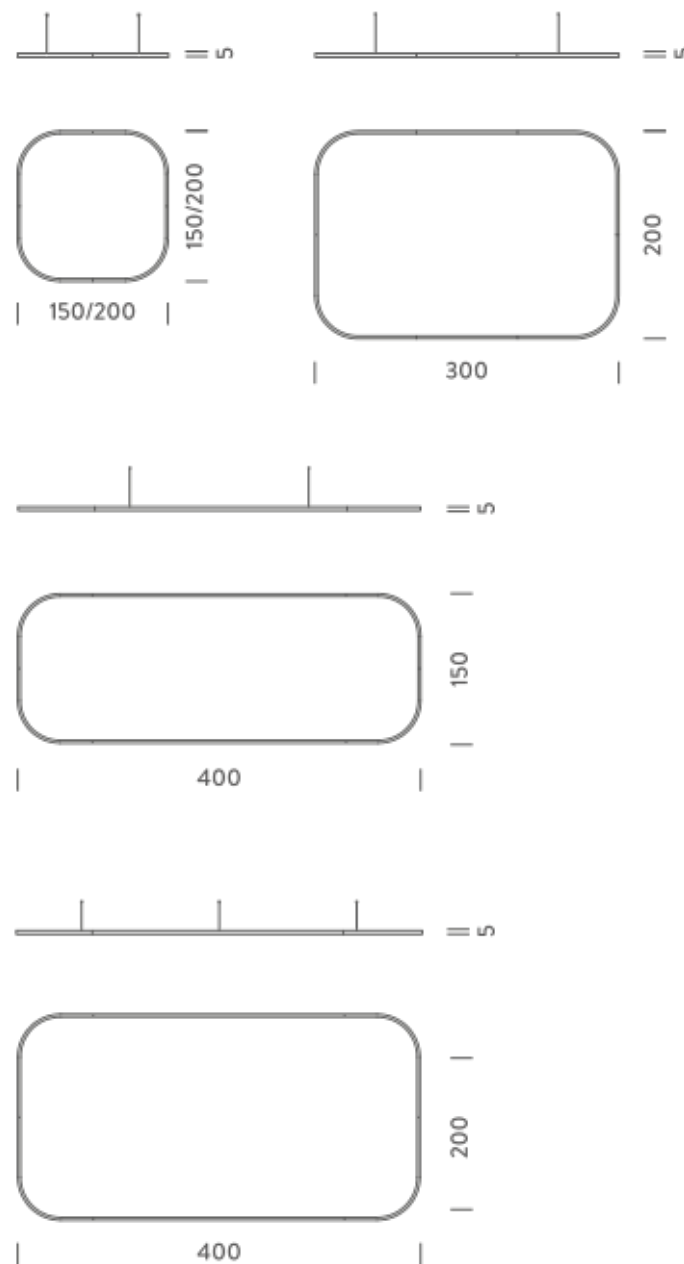

1,5X1,5M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|-------------------|---------------------|
| Source | Linear LED |
| Total power | 154W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 10427lm |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 150x150x5cm |
| Materials | Aluminium |
| Notes | |

included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled

Customization options

Shapes, sizes

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

6,1 kg

Codes

BZRQ1712G15NBO
BZRQ1712G15NNE
BZRQ1712G15NOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni



NEMO 3.000

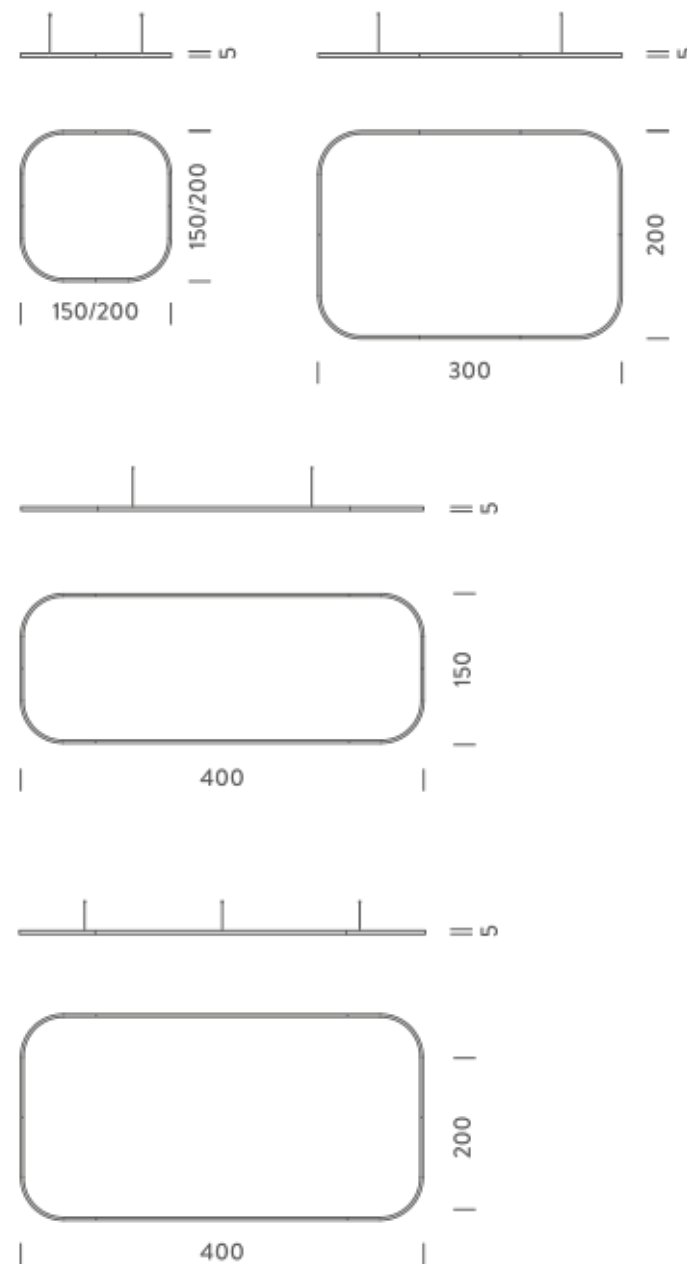

2X2M | DOWNLIGHT - 2700KE

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 105W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 6098lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 200x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 7,8 kg |

Codes

BZRQ1608G15DBO
BZRQ1608G15DNE
BZRQ1608G15DOR


PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

Certificazioni



NEMO^{3.000}

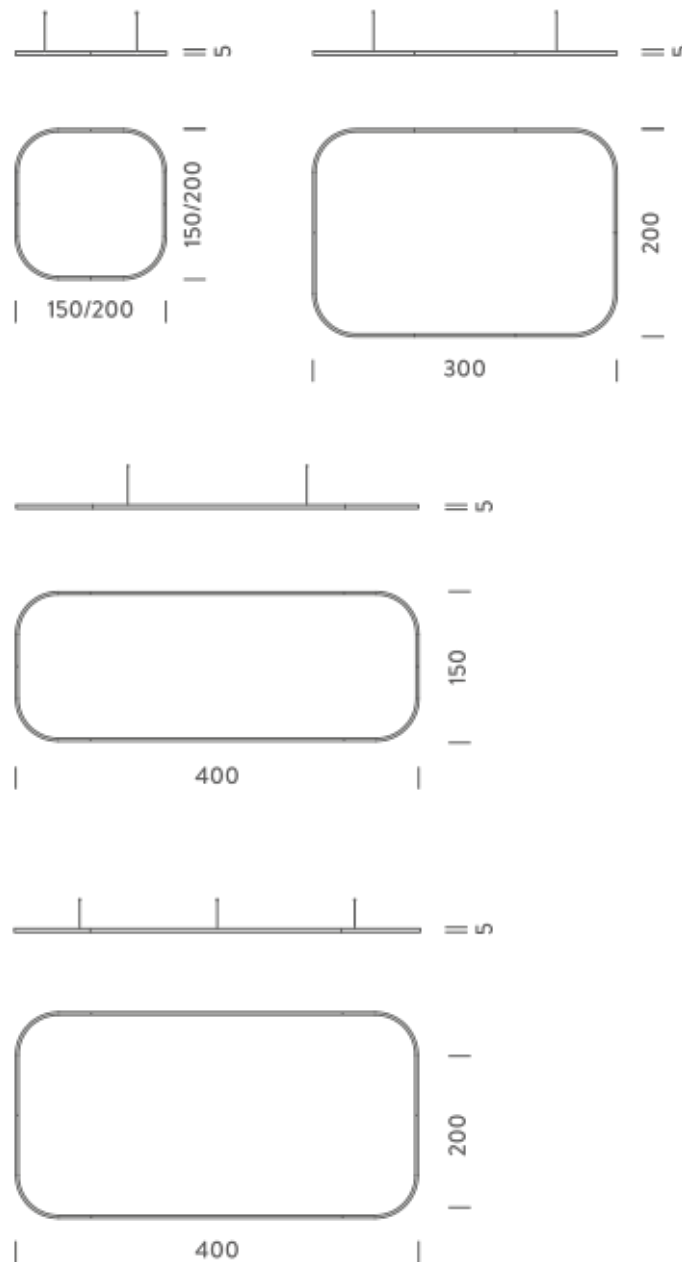

2X2M | UP - DOWNLIGHT - 2700K

LAMPING

| | |
|-------------------|--|
| Source | Linear LED |
| Total power | 211W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 12195lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 200x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |

Customization options

Accessories

Net lamp weight

Codes

BZRQ1716G15DBO
BZRQ1716G15DNE
BZRQ1716G15DOR

PACKAGE


Package 01

| | |
|--|------------------------|
| Structure | white black gold |
| Dimension: 210x110x15 cm / Gross weight: 13,5 kg | |

Certificazioni



NEMO^{3.000}

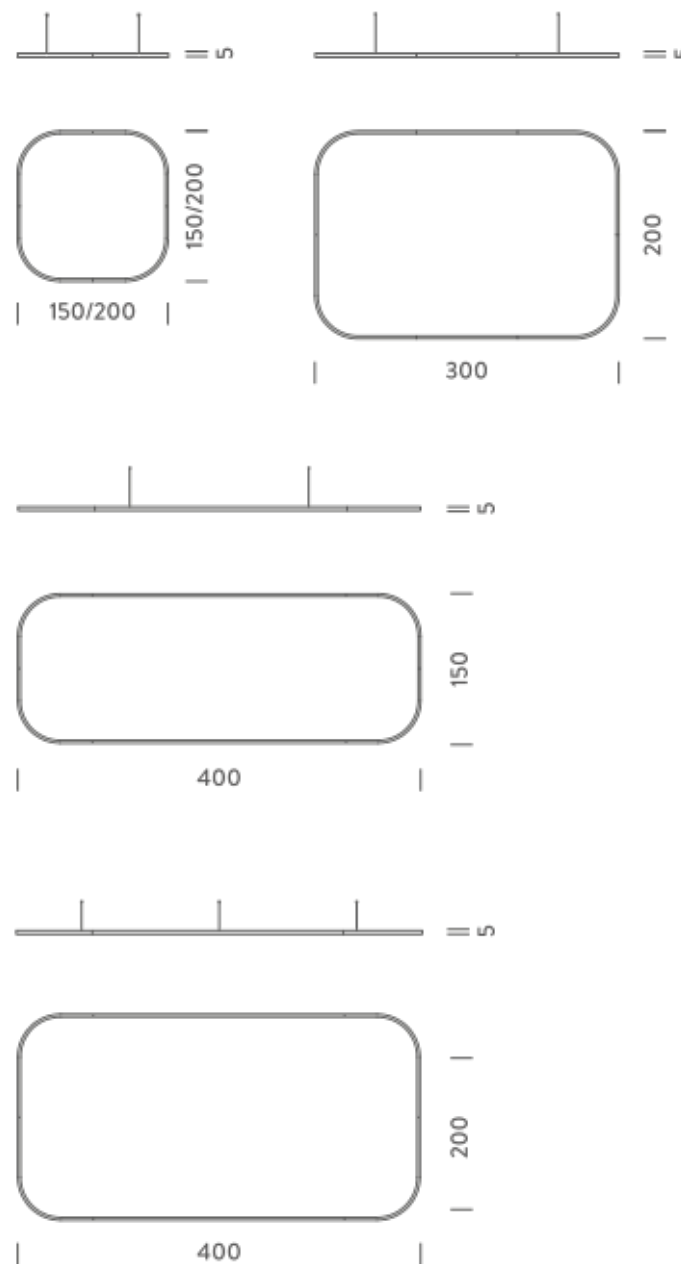

2X2M | DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 105W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 6456lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 200x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 7,8 kg |

Codes

BZRQ1608G15WBO
BZRQ1608G15WNE
BZRQ1608G15WOR


PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

Certificazioni



NEMO^{3,000}

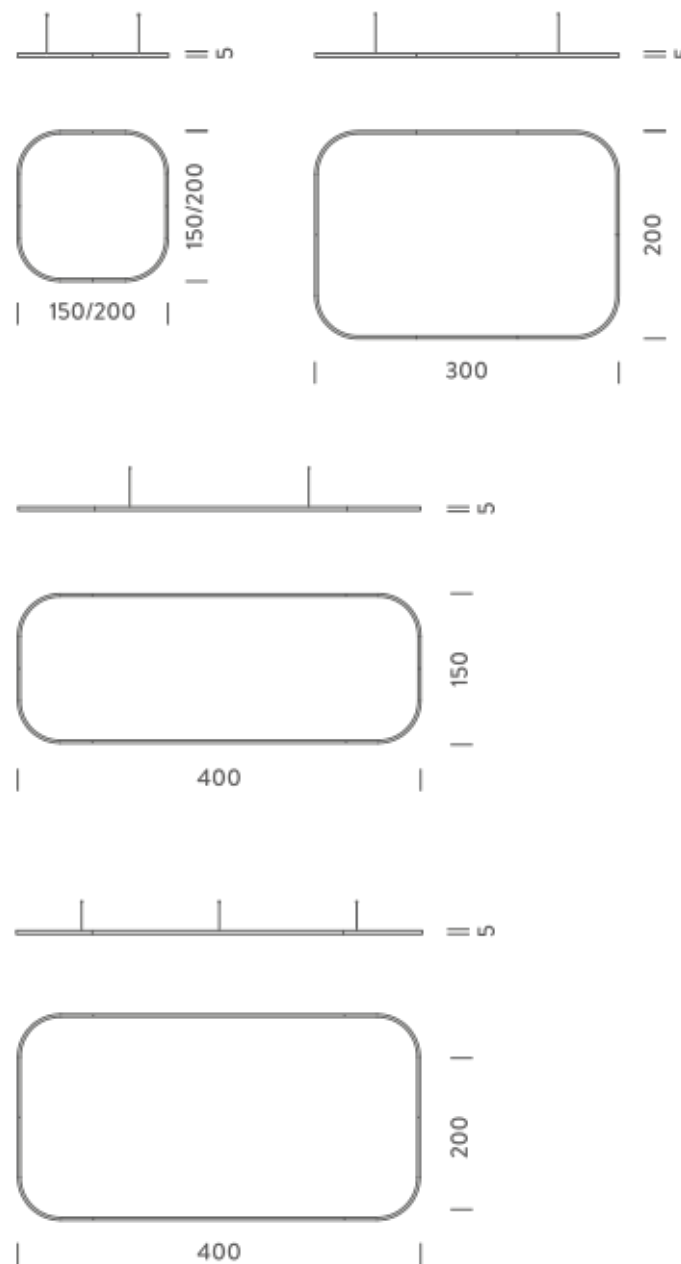

2X2M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 211W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 12912lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 200x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |
| Net lamp weight | 8,1 kg |

Codes

BZRQ1716G15WBO
BZRQ1716G15WNE
BZRQ1716G15WOR


PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,5 kg

Certificazioni



NEMO s.p.a.

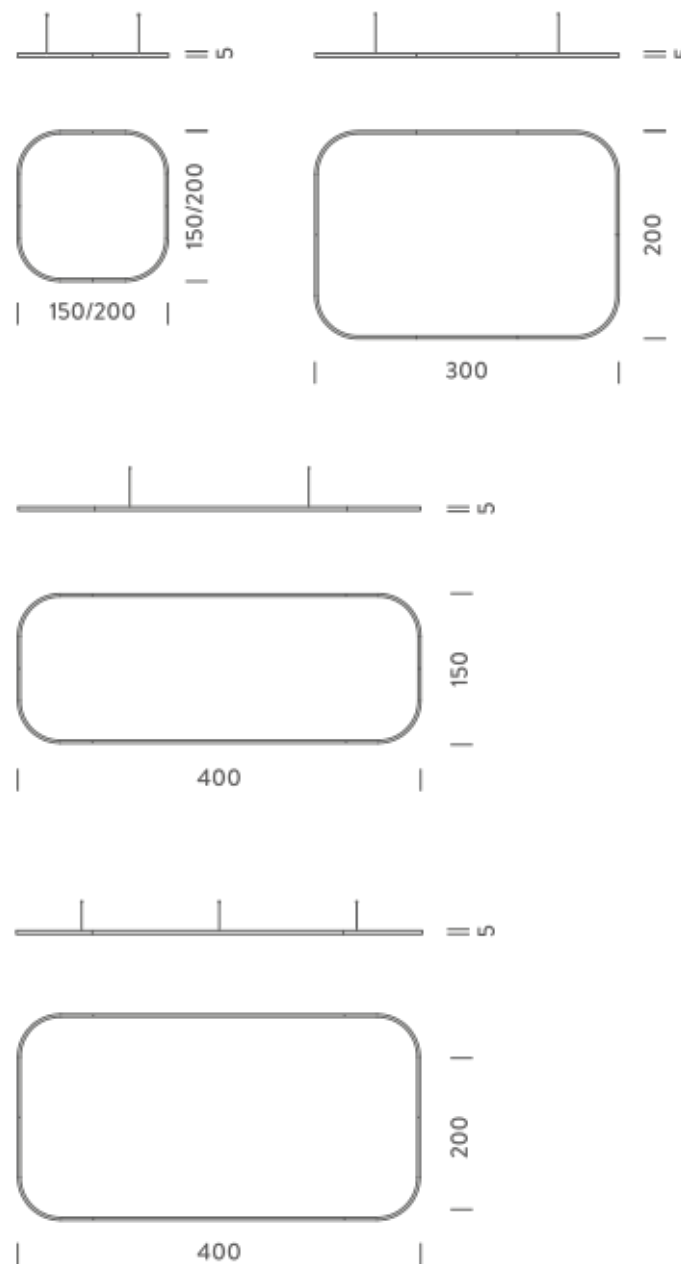

2X2M | DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 105W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 7174lm |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 200x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 7,8 kg |

Codes

BZRQ1608G15NBO
BZRQ1608G15NNE
BZRQ1608G15NOR


PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

Certificazioni



NEMO^{3.000}

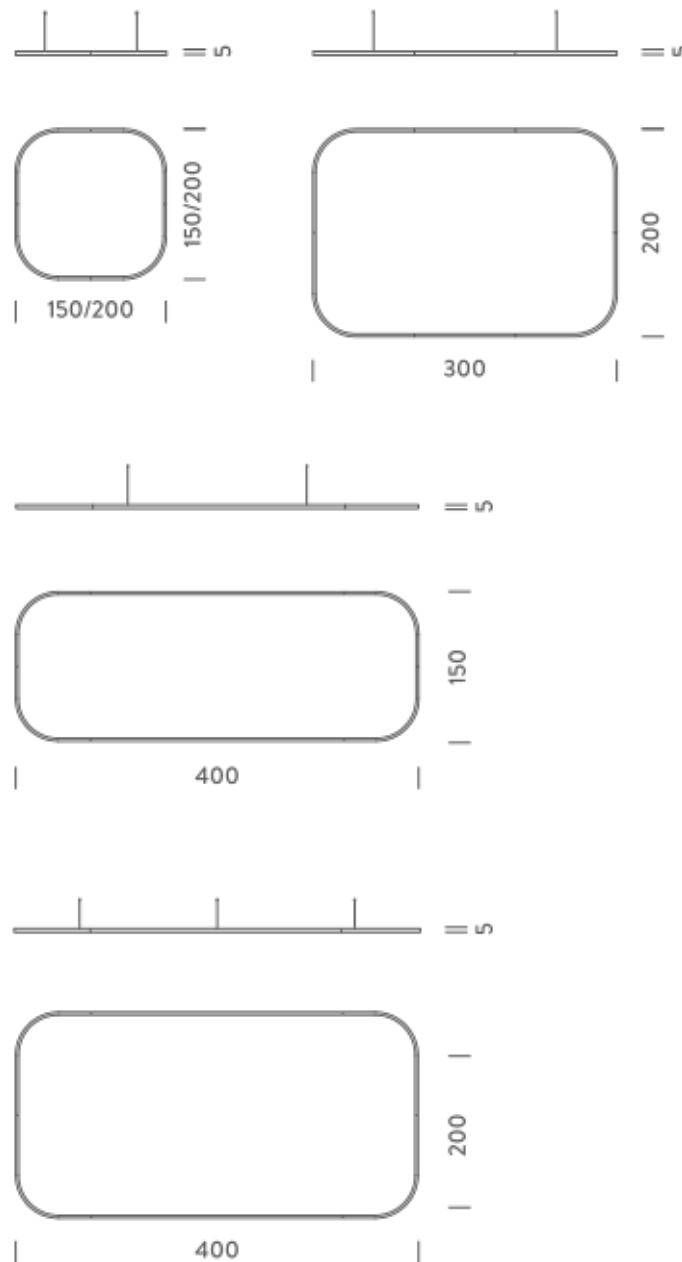

2X2M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 211W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 14347lm |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 200x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |
| Net lamp weight | 8,1 kg |

Codes

BZRQ1716G15NBO
BZRQ1716G15NNE
BZRQ1716G15NOR


PACKAGE

Package 01

Structure

white
black
gold

Dimension: 210x110x15 cm / Gross weight: 13,5 kg

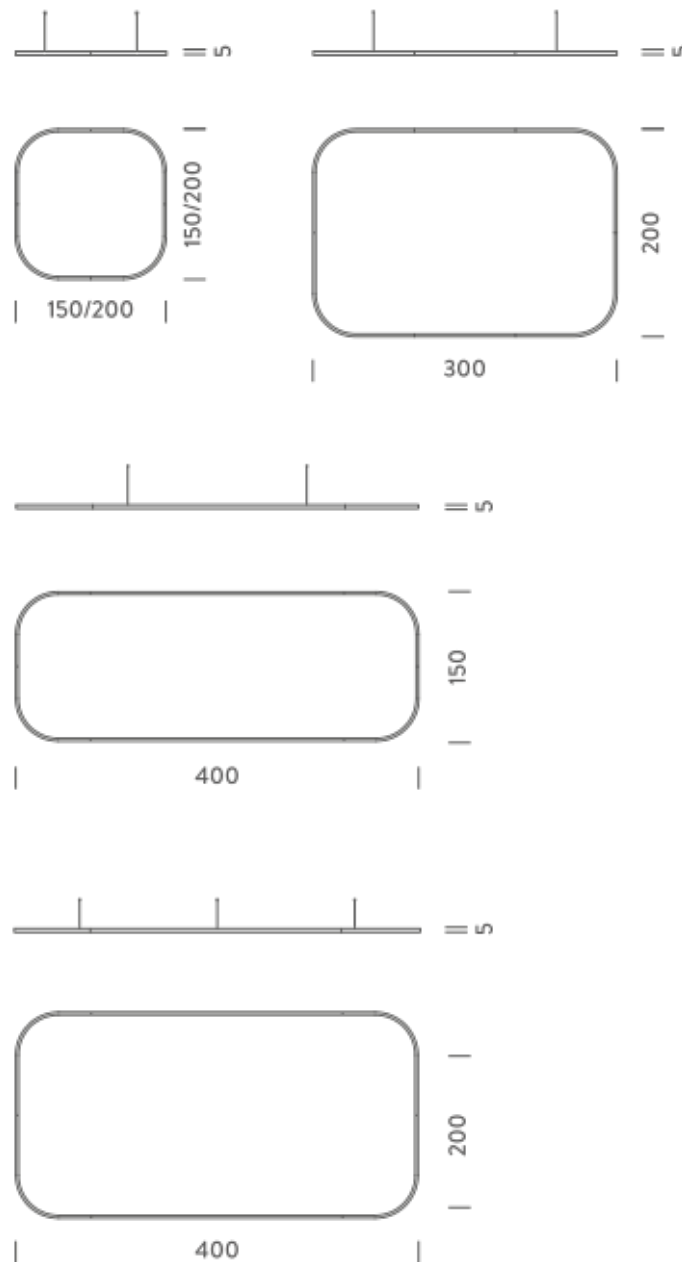

Certificazioni



NEMO^{3.000}

3X2M | DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 134W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 7764lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 300x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |
| Net lamp weight | 9,9 kg |

Codes

BZRQ1610G15DBO
BZRQ1610G15DNE
BZRQ1610G15DOR


PACKAGE

Package 01

Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 17,9 kg

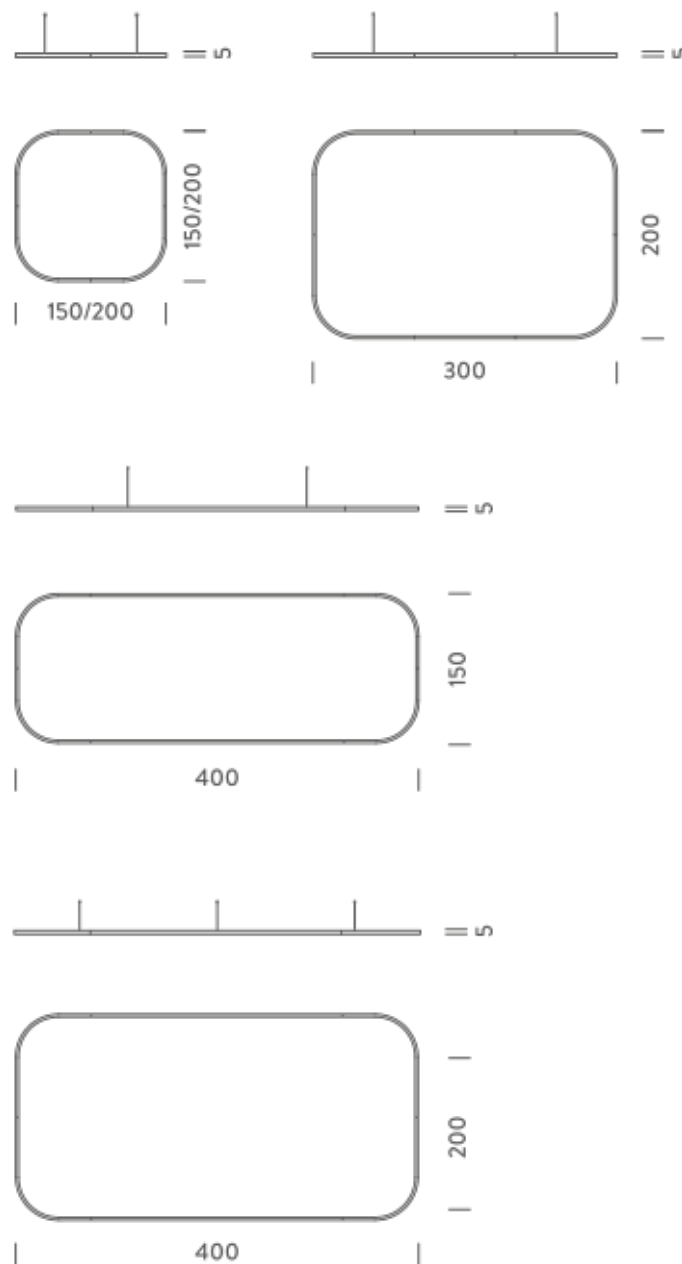

Certificazioni



NEMO^{3,000}

3X2M | UP - DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 268W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 15527lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 300x200x5cm |
| Materials | Aluminium |
| Notes | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 10,7 kg |

Codes

BZRQ1720G15DBO
BZRQ1720G15DNE
BZRQ1720G15DOR


PACKAGE

Package 01

Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 18,7 kg

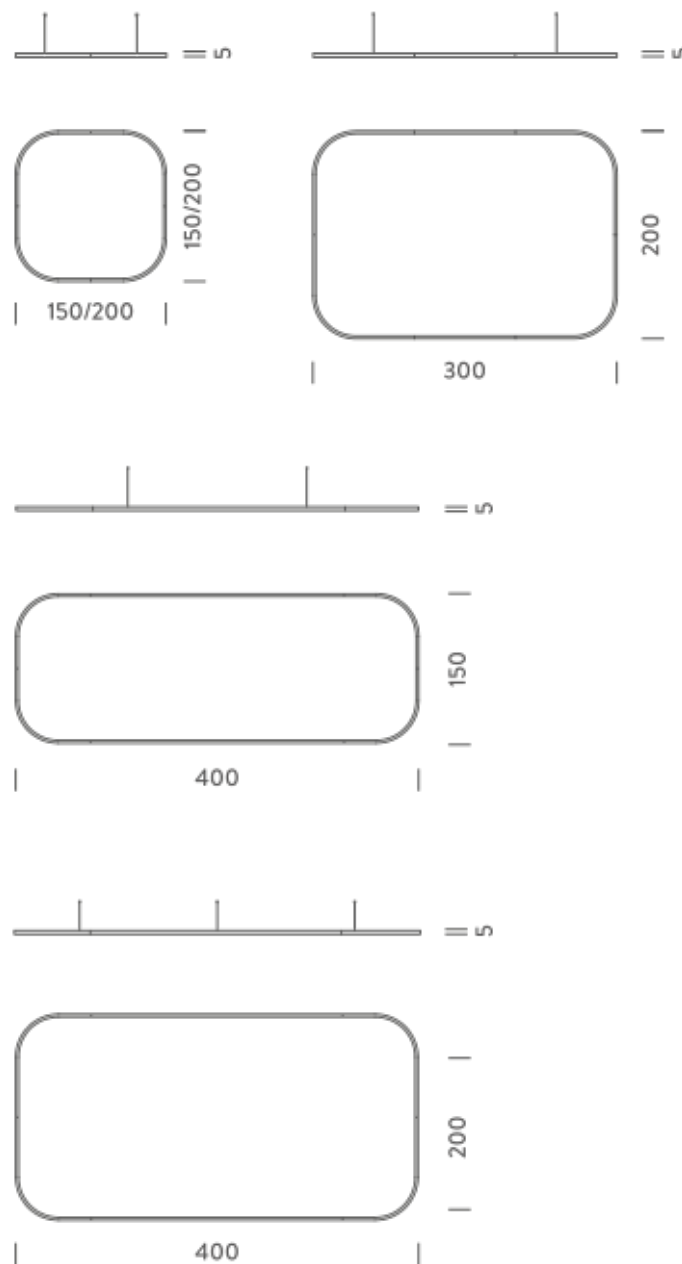

Certificazioni



NEMO^{3,000}

3X2M | DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 134W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 8220lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 300x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |
| Net lamp weight | 9,9 kg |

Codes

BZRQ1610G15WBO
BZRQ1610G15WNE
BZRQ1610G15WOR


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 17,9 kg

Certificazioni



NEMO^{3.000}

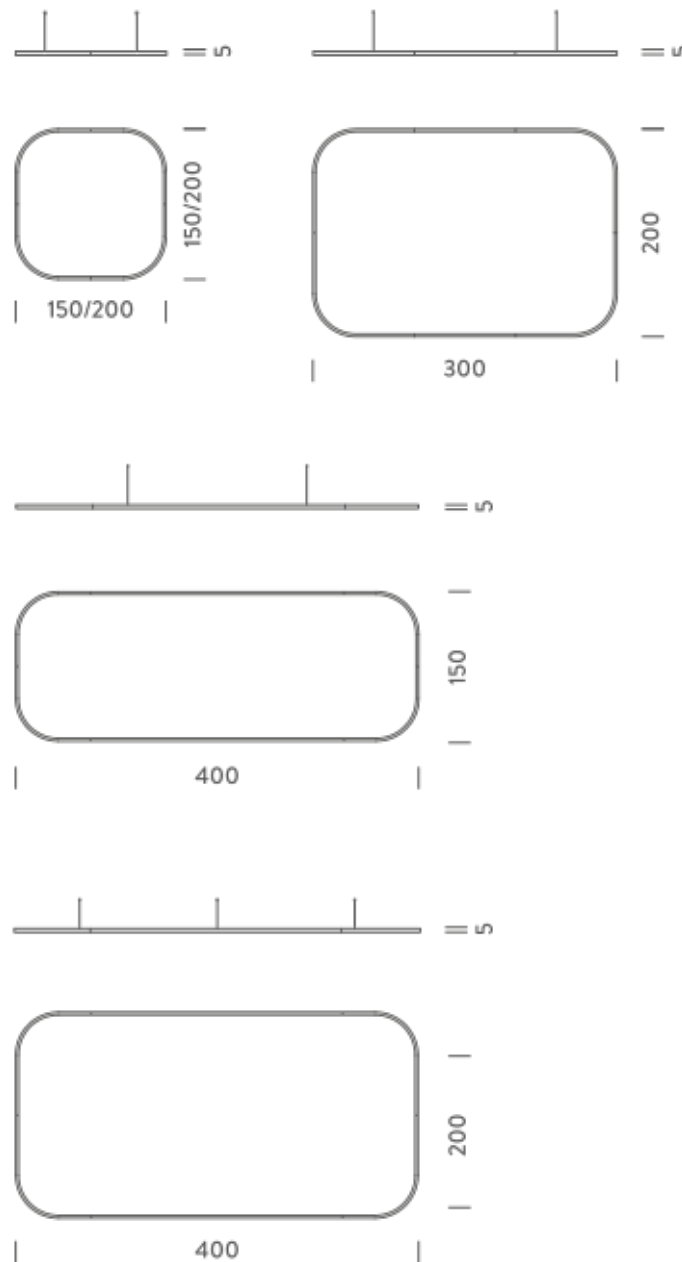

3X2M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 268W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 16440lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 300x200x5cm |
| Materials | Aluminium |
| Notes | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 10,7 kg |

Codes

BZRQ1720G15WBO
BZRQ1720G15WNE
BZRQ1720G15WOR


PACKAGE

Package 01

Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 18,7 kg

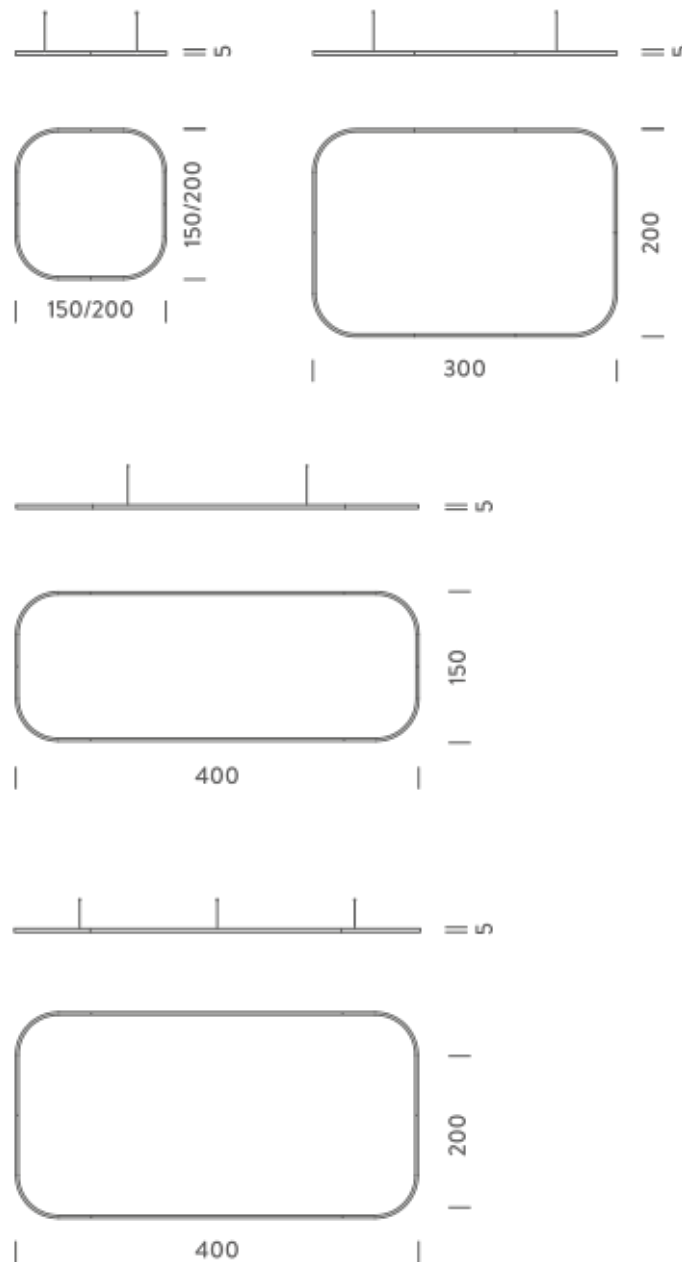

Certificazioni



NEMO 3.000

3X2M | DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 134W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 9134lm |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 300x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |
| Net lamp weight | 9,9 kg |

Codes

BZRQ1610G15NBO
BZRQ1610G15NNE
BZRQ1610G15NOR


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 17,9 kg

Certificazioni



NEMO^{3.000}

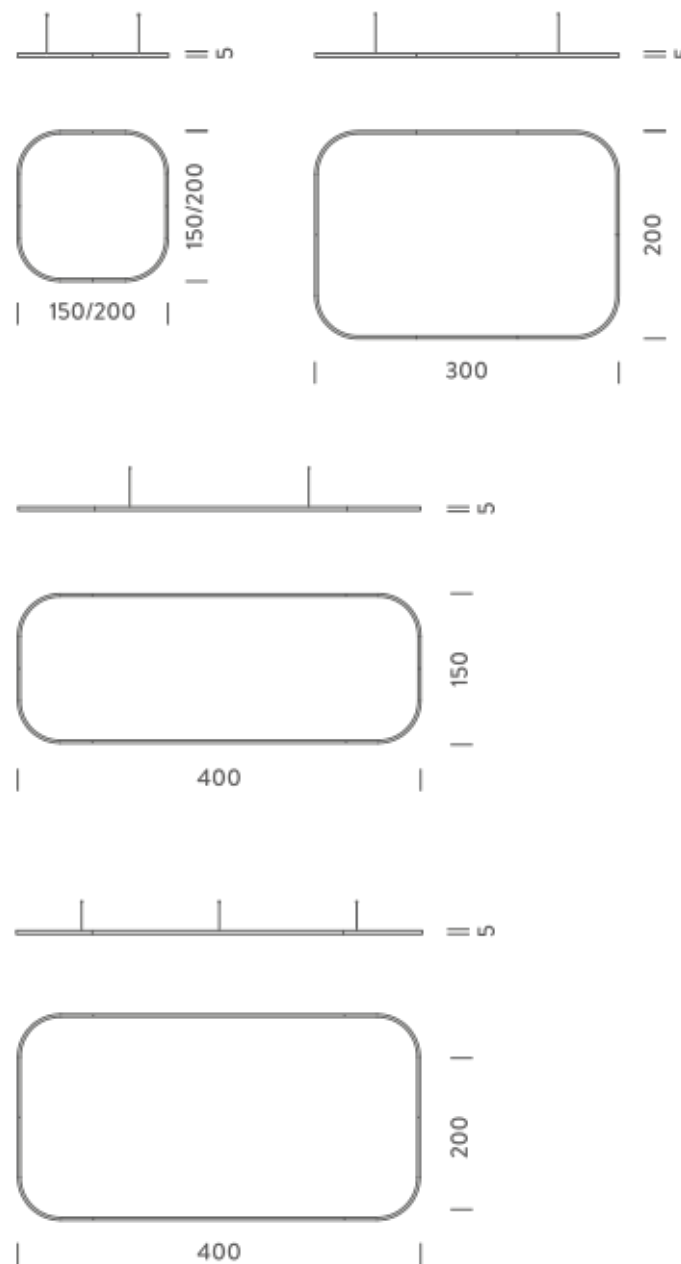

3X2M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 268W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 18267lm |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 300x200x5cm |
| Materials | Aluminium |
| Notes | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |
| Net lamp weight | 10,7 kg |

Codes

BZRQ1720G15NBO

BZRQ1720G15NNE

BZRQ1720G15NOR

PACKAGE

Package 01

Dimension: 310x110x15 cm / Gross weight: 18,7 kg

Certificazioni




Structure

white

black

gold

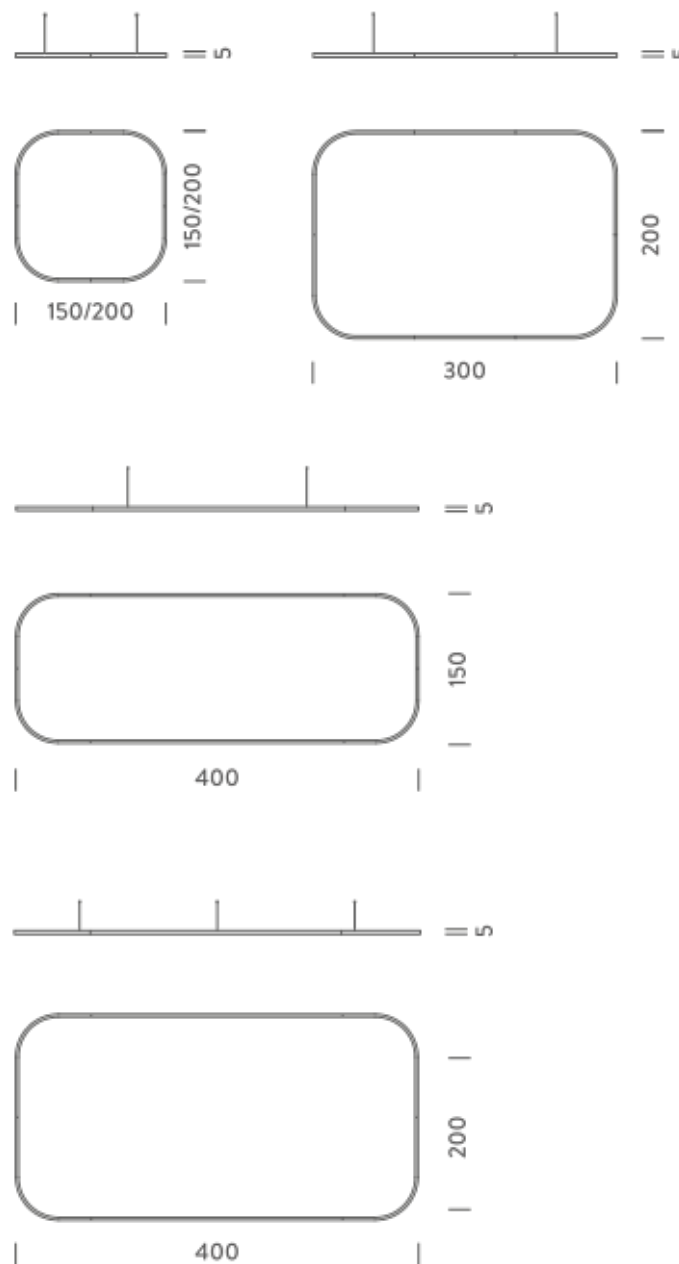

4X1,5M | DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 149W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 8597lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 400x150x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |
| Net lamp weight | 11,3 kg |

Codes

BZRQ1611G15DBO

BZRQ1611G15DNE

BZRQ1611G15DOR

PACKAGE

Package 01

Structure


white

black

gold

Dimension: 310x110x15 cm / Gross weight: 19,3 kg

Certificazioni

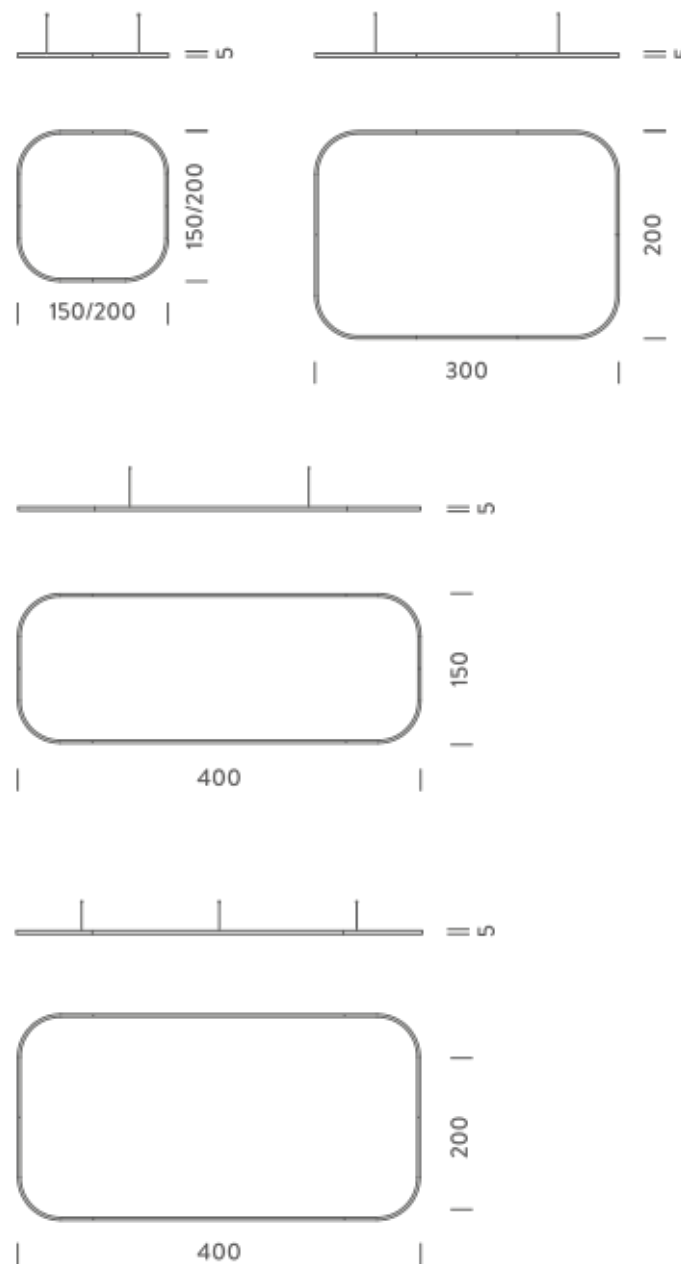

4X1,5M | UP - DOWNLIGHT - 2700K

LAMPING

| | |
|-------------------|--|
| Source | Linear LED |
| Total power | 297W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 17193lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 400x150x5cm |
| Materials | Aluminium |
| Notes | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |

Customization options

Accessories

Net lamp weight

Codes

BZRQ1722G15DBO
BZRQ1722G15DNE
BZRQ1722G15DOR

PACKAGE

Package 01

Shapes, sizes


Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

12,1 kg

Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 20,1 kg

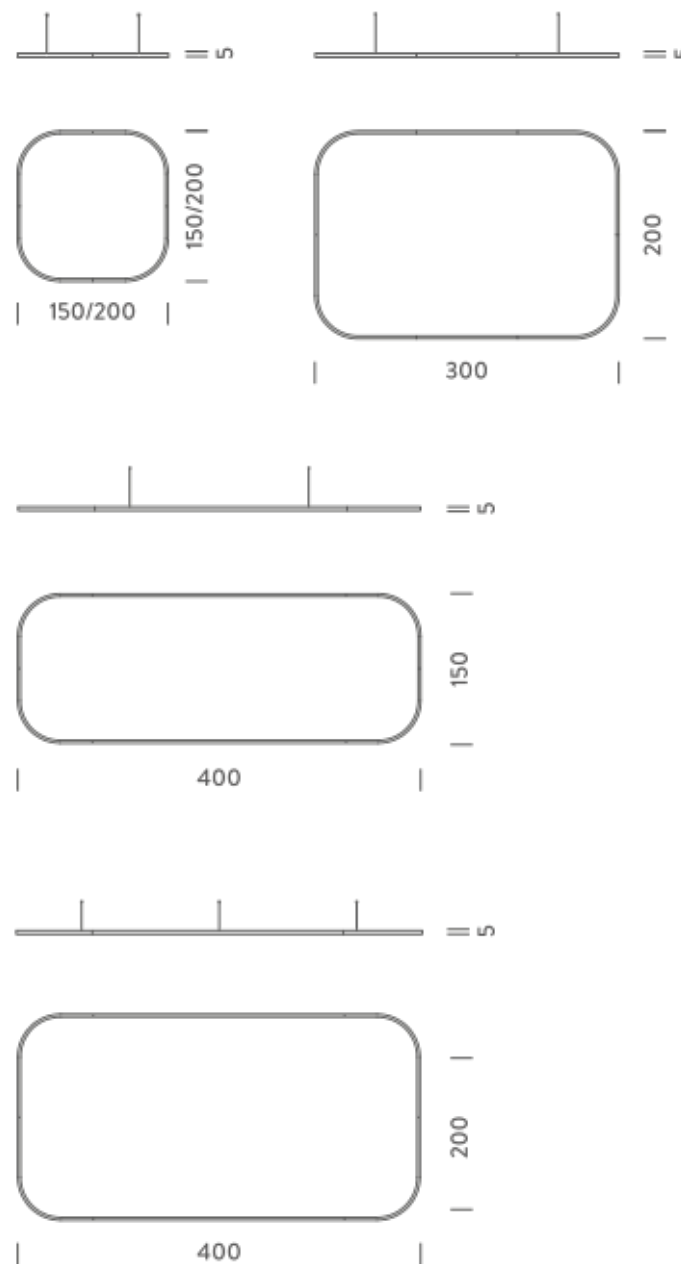

Certificazioni



NEMO.s.p.a.

4X1,5M | DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 149W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 9102lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 400x150x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |
| Net lamp weight | 11,3 kg |

Codes

BZRQ1611G15WBO
BZRQ1611G15WNE
BZRQ1611G15WOR

PACKAGE


Package 01

Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 19,3 kg

Certificazioni

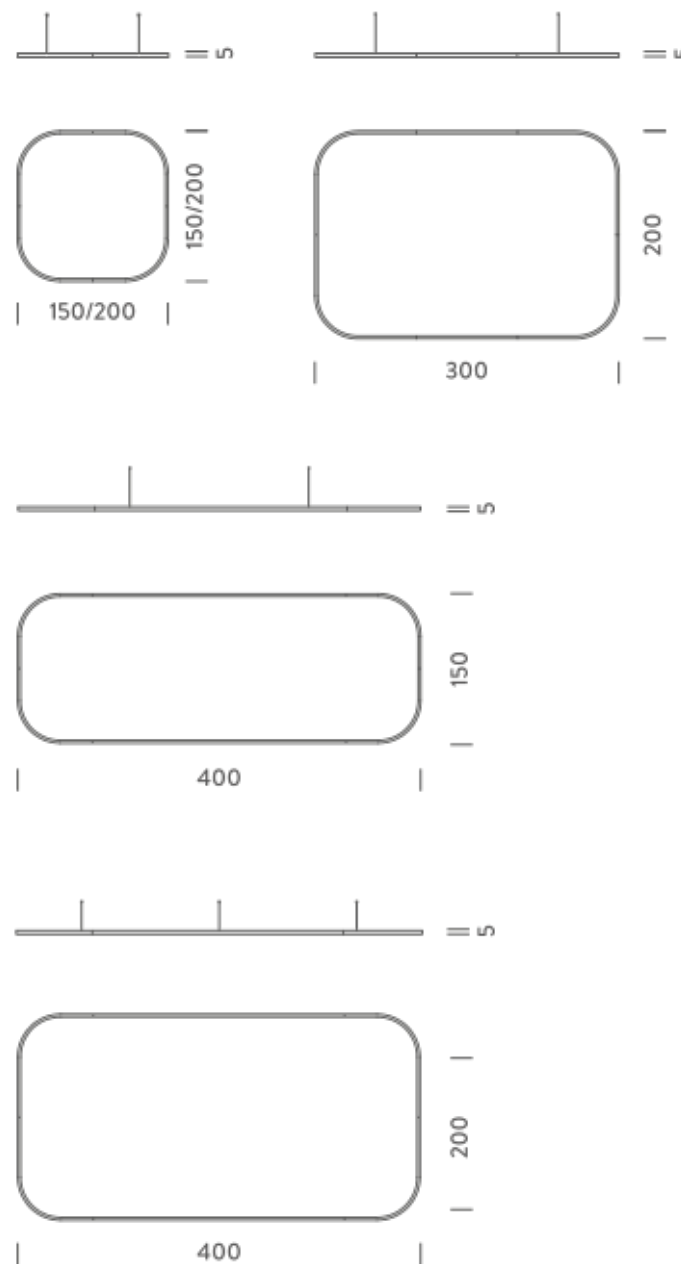

4X1,5M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 297W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 18204lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 400x150x5cm |
| Materials | Aluminium |
| Notes | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |
| Net lamp weight | 12,1 kg |

Codes

BZRQ1722G15WBO
BZRQ1722G15WNE
BZRQ1722G15WOR


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,1 kg

Certificazioni



NEMO^{3.000}

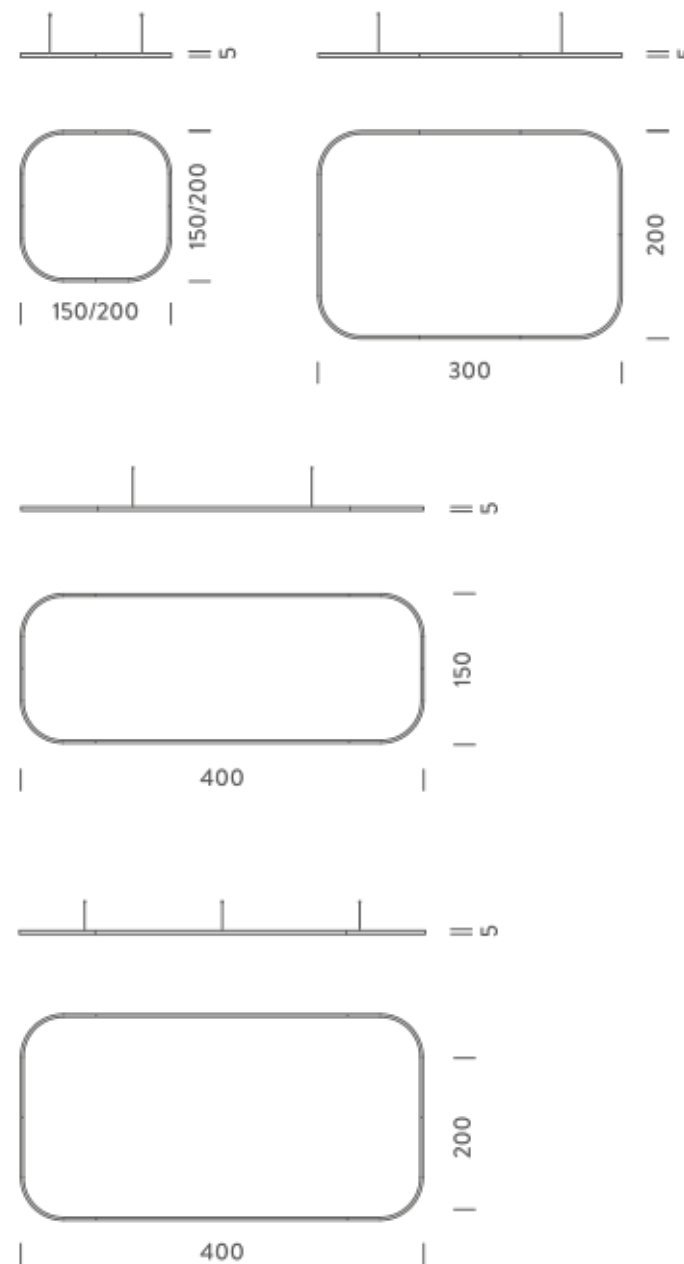

4X1,5M | DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 149W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 10114lm |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 400x150x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |
| Net lamp weight | 11,3 kg |

Codes

BZRQ1611G15NBO
BZRQ1611G15NNE
BZRQ1611G15NOR

PACKAGE


Package 01

Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 19,3 kg

Certificazioni

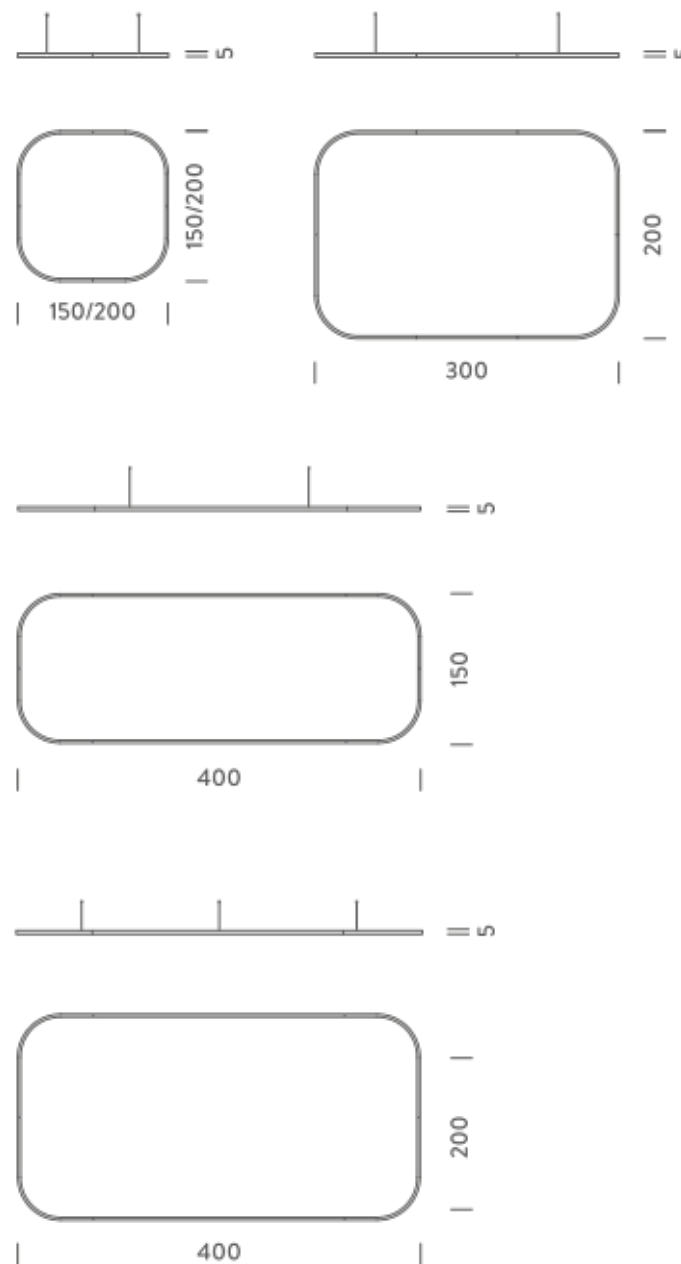

4X1,5M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 297W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 20227lm |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 400x150x5cm |
| Materials | Aluminium |
| Notes | included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |
| Net lamp weight | 12,1 kg |

Codes

BZRQ1722G15NBO
BZRQ1722G15NNE
BZRQ1722G15NOR


PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,1 kg

Certificazioni



NEMO^{3.000}

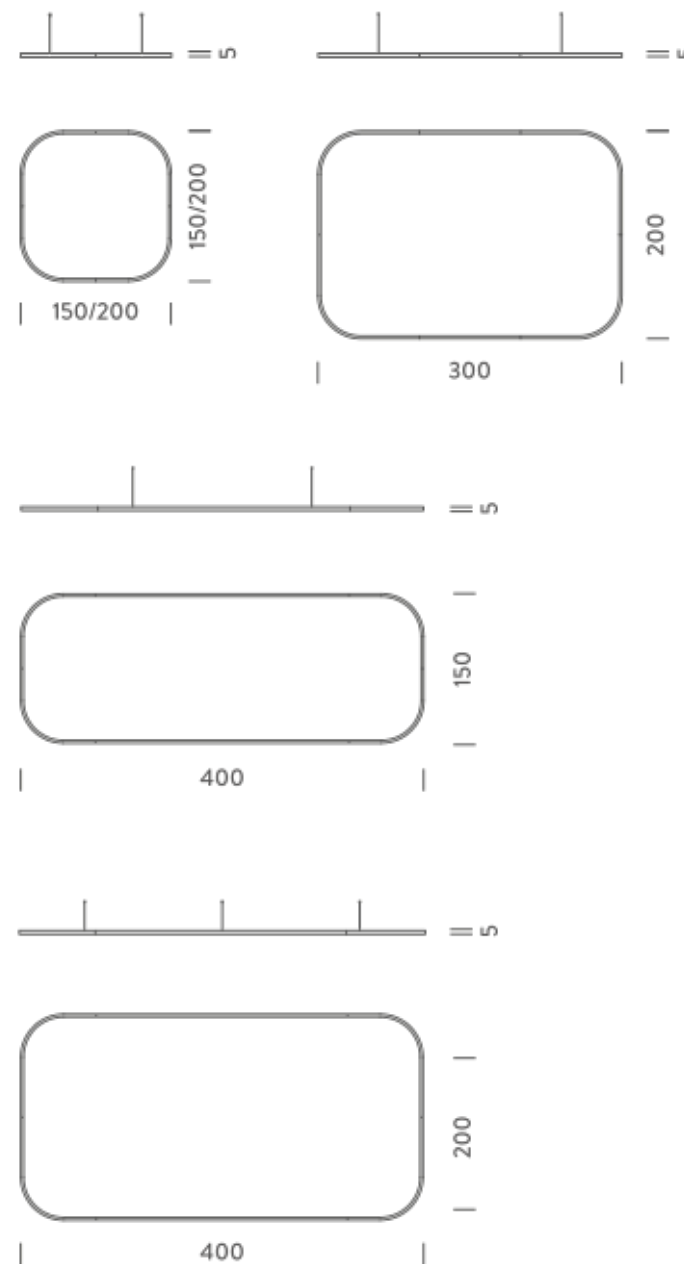

4X2M | DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 163W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 9430lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |
| Net lamp weight | 12,3 kg |

Codes

BZRQ1612G15DBO
BZRQ1612G15DNE
BZRQ1612G15DOR


PACKAGE

Package 01

Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

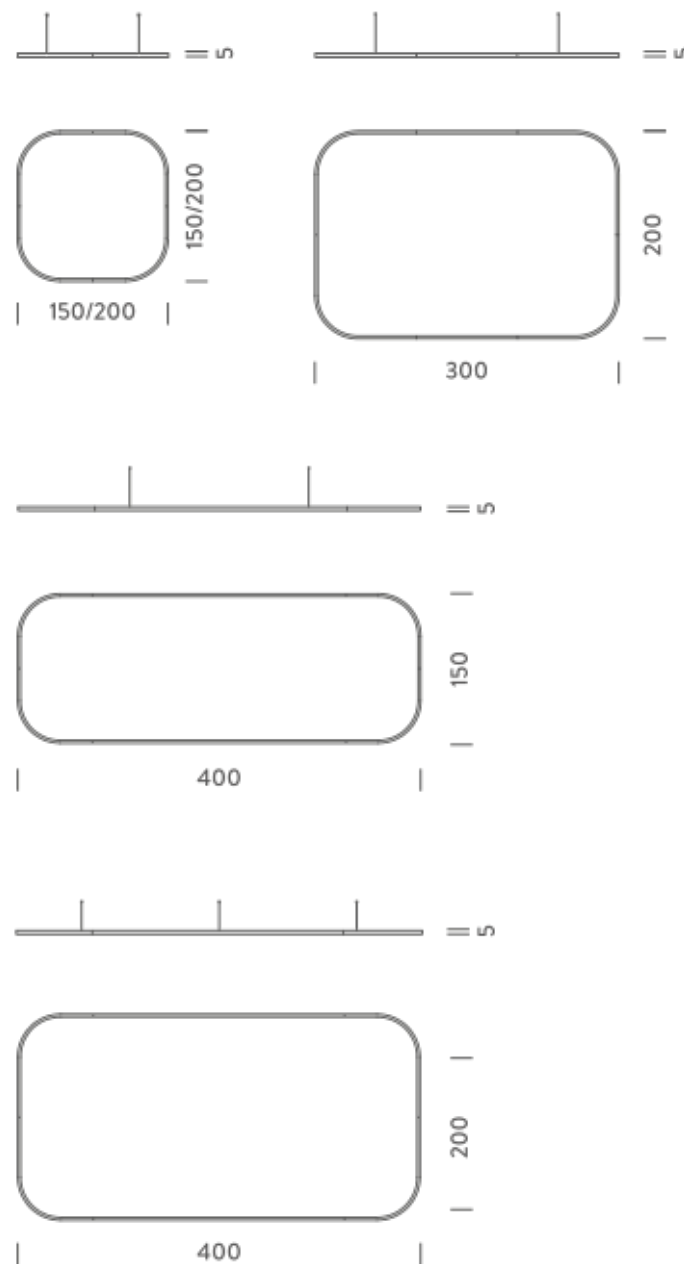

4X2M | UP - DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 326W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 2700K |
| Luminous flux | 18859lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Notes | included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |
| Net lamp weight | 13,2 kg |

Codes

BZRQ1724G15DBO

BZRQ1724G15DNE

BZRQ1724G15DOR

PACKAGE

Package 01

Structure

white

black


gold

Dimension: 310x110x15 cm / Gross weight: 21,2 kg

Certificazioni



NEMO^{3,000}

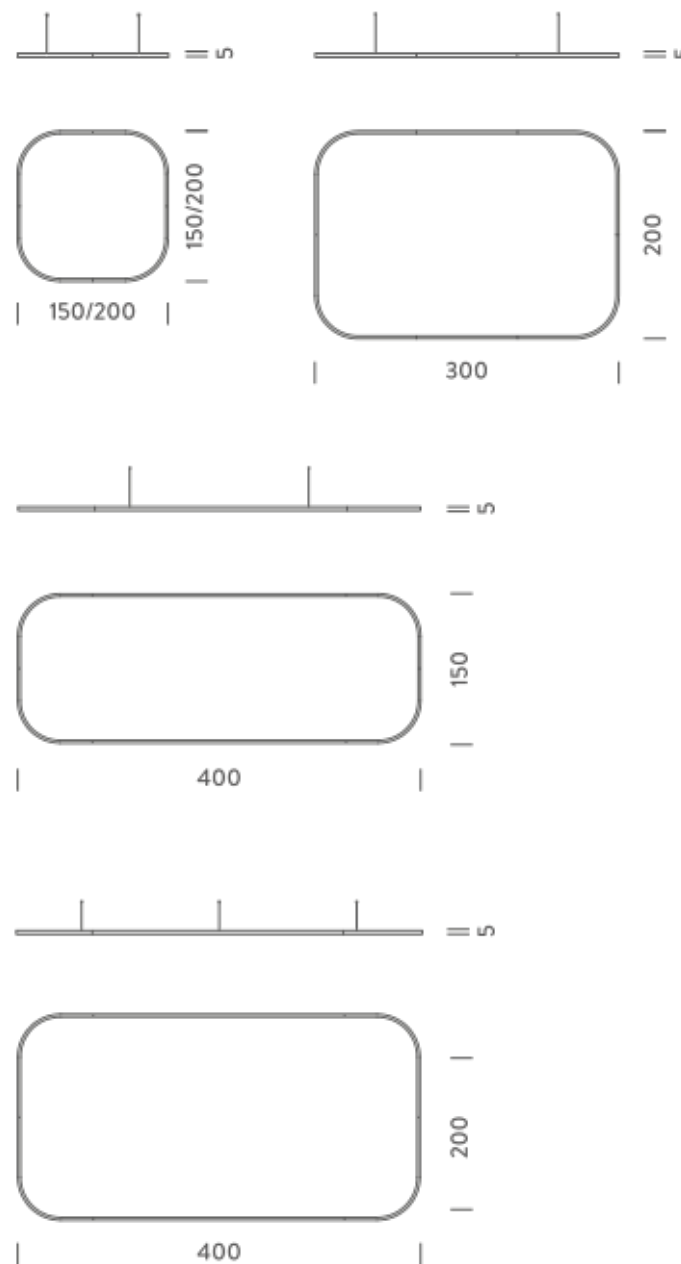

4X2M | DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 163W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 9984lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Notes | included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |
| Net lamp weight | 12,3 kg |

Codes

BZRQ1612G15WBO
BZRQ1612G15WNE
BZRQ1612G15WOR

PACKAGE


Package 01

Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni

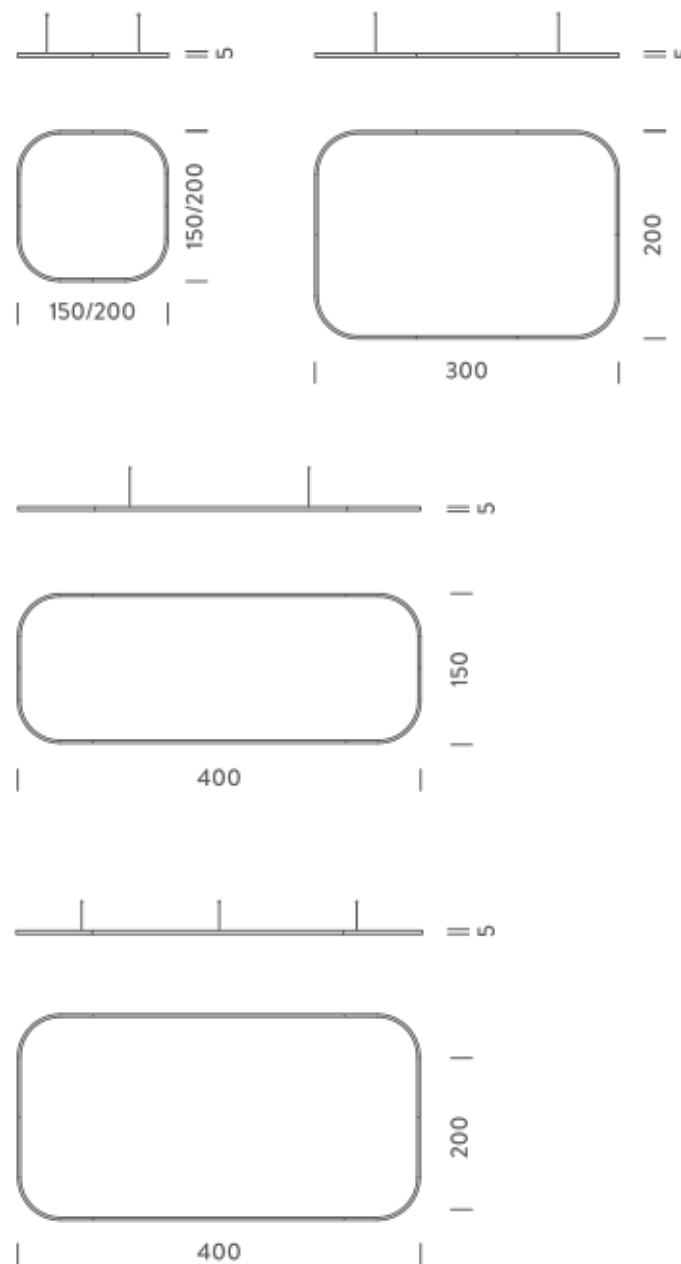

4X2M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 326W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 19968lm |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Notes | included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |
| Net lamp weight | 13,2 kg |

Codes

BZRQ1724G15WBO
BZRQ1724G15WNE
BZRQ1724G15WOR

PACKAGE


Package 01

Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 21,2 kg

Certificazioni

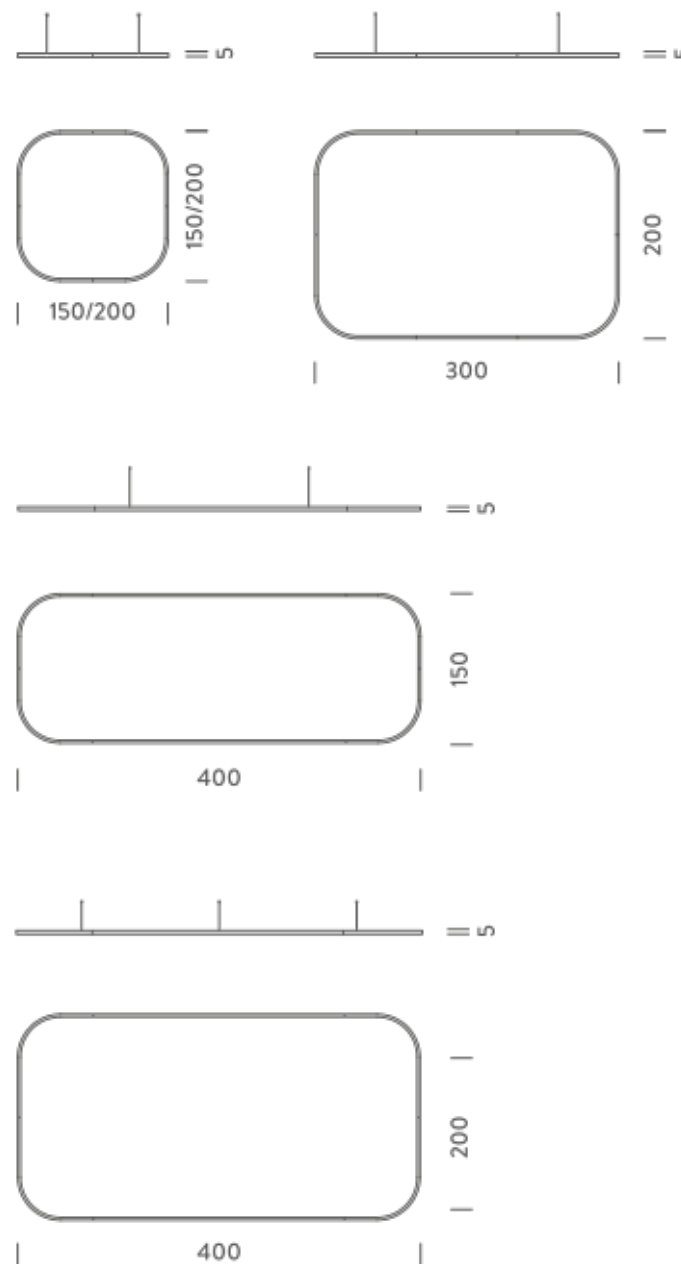

4X2M | DOWNLIGHT - 4000K

LAMPING

| | |
|---------------------------------|---------------------|
| Source | Linear LED |
| Total power | 163W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 11094lm |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Ambient temperature range | 0°C / 35° |
| Performance ambient temperature | 25° |

Notes
included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces

Customization options

Shapes, sizes

Accessories

Canopy, for concrete ceiling | Ceiling plate, for false ceiling

Net lamp weight

12,3 kg

Codes

BZRQ1612G15NBO
BZRQ1612G15NNE
BZRQ1612G15NOR

Structure


white
black
gold

PACKAGE

Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni

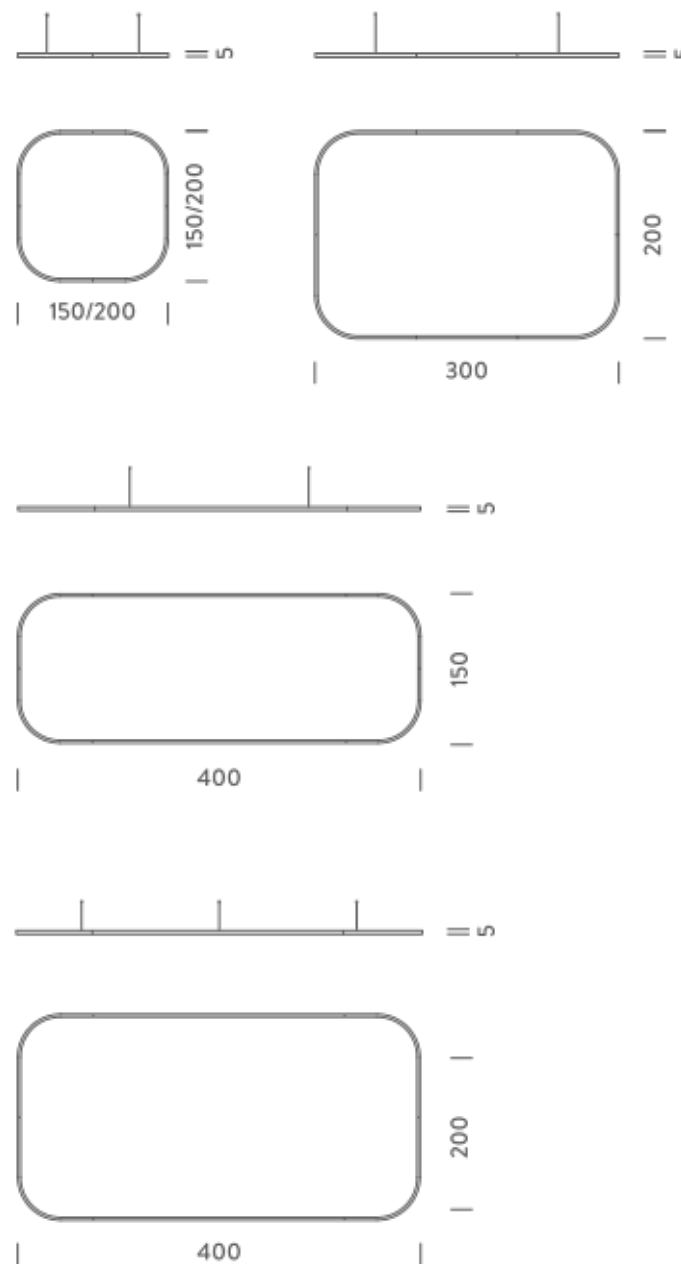

4X2M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|---------------------------------|--|
| Source | Linear LED |
| Total power | 326W |
| Emission | Diffused orientable |
| Switching | DALI 1-100% |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 22187lm |
| Initial luminaire efficacy | 35lm/W |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Ambient temperature range | 0°C / 35° |
| Performance ambient temperature | 25° |
| Notes | included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |
| Net lamp weight | 13,2 kg |

Codes

BZRQ1724G15NBO
BZRQ1724G15NNE
BZRQ1724G15NOR


PACKAGE

Package 01

Dimension: 310x110x15 cm / Gross weight: 21,2 kg

Structure

white
black
gold

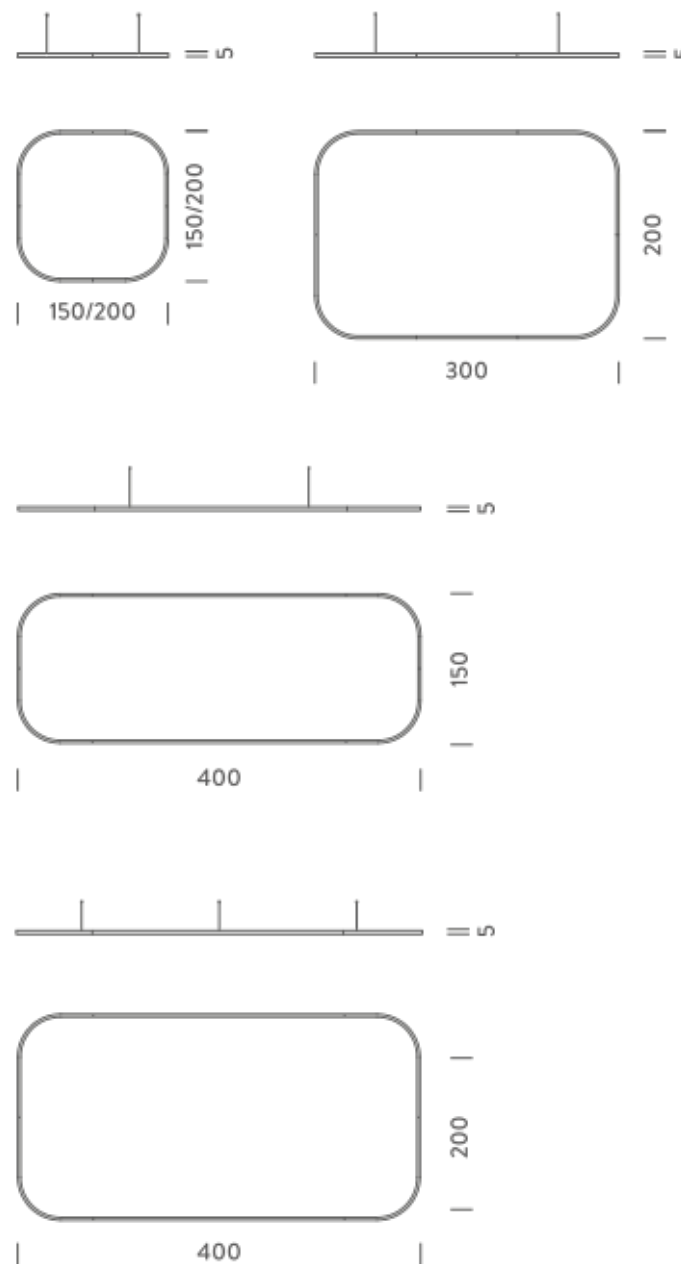

Certificazioni

