


Data sheet

CODE	A09830.001.0406
SYSTEM POWER CONSUMPTION	18W
EFFICACY	79.5lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1431lm
LUMEN OUTPUT	1431lm
EFFICIENCY	100%
WEIGHT	1,00 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	14,0 x 30,0 x 13,0 cm




Wall lighting fixture for interiors, with indirect light emission.
Die-cast aluminium wall bracket in polyacrylic paint.
Extruded aluminium structure in white, mat brass or titanium polyacrylic paint.

Technical drawing

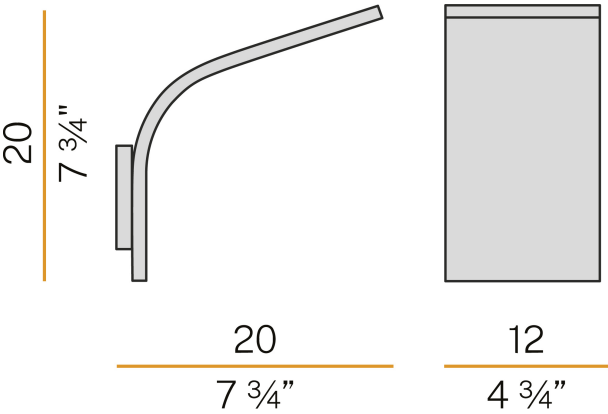

Polar diagram

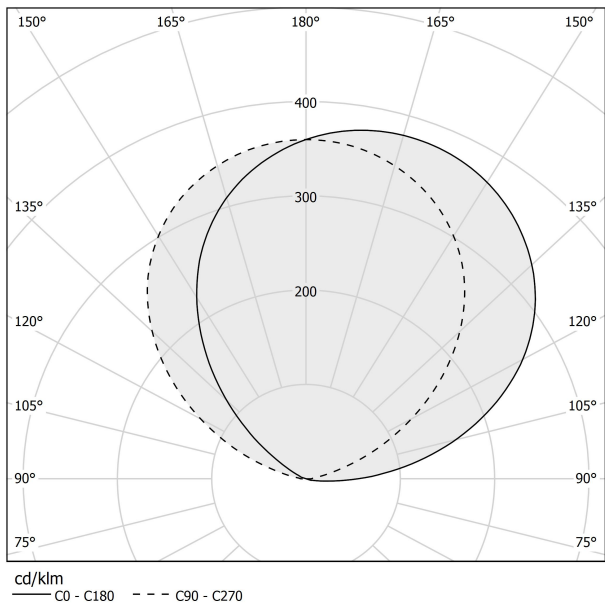

Accessories / dimming

XM14/230

Dimmable device for 230V LED modules, 5÷100W.

